



Top Tip Style

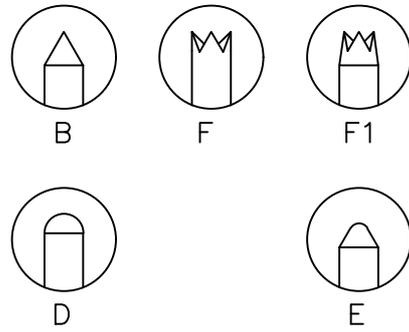

Bottom Tip Style

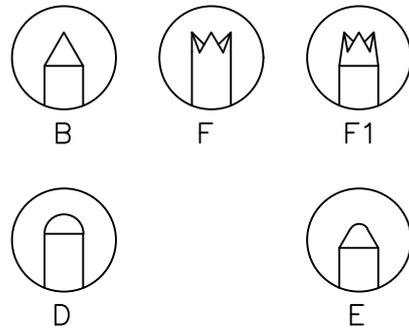

- Mechanical  
 Pitch: 0.4mm  
 Recommended travel: 0.65mm  
 Full travel: 1.10mm  
 Spring force:  $10g \pm 3g$  at recommended travel
- Material and plating  
 Top Plunger: Hardened BeCu, Gold plated  
 Bottom Plunger: Hardened BeCu, Gold plated  
 Barrel: Phosphor Bronze, Gold plated  
 Spring: SWP-A/B, Gold plated
- Electrical Specifications  
 Current Rating: 0.5amps  
 Resistance: Less than  $80m\Omega$

	Name	Date	Description:	Scale:
Drawn				
Approved				
Checked				
TEX			Part NO.: TEX030-D-F-5.7	Index: Size: A4