



Top Tip Style

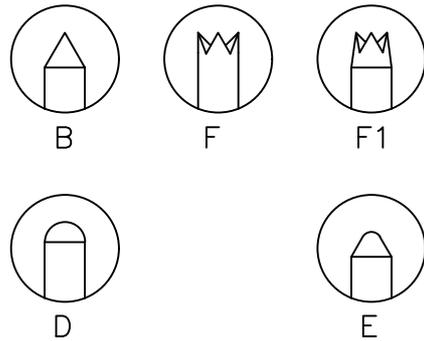

Bottom Tip Style

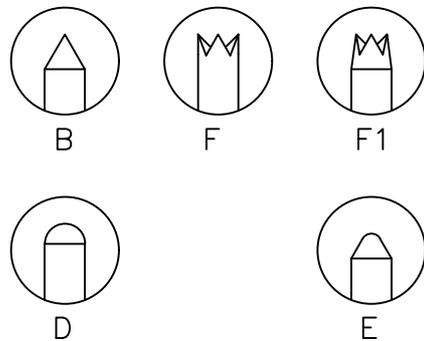

■ Mechanical

Pitch: 0.4mm

Recommended travel: 0.7mm

Full travel: 2.0mm

Spring force: 20g±6g at recommended travel

■ Material and plating

Top Plunger: Hardened SK4, Gold plated

Bottom Plunger: Hardened SK4, Gold plated

Barrel: Phosphor Bronze, Gold plated

Spring: SUS304, Gold plated

■ Electrical Specifications

Current Rating: 0.5amps

Resistance: Less than 100mΩ

	Name	Date	Description:	Scale:
Drawn				
Approved				
Checked				
			Part NO.: TEX030-F-D-8.85	Index: Size: A4