



Top Tip Style

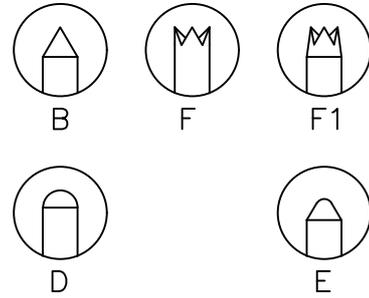

Bottom Tip Style

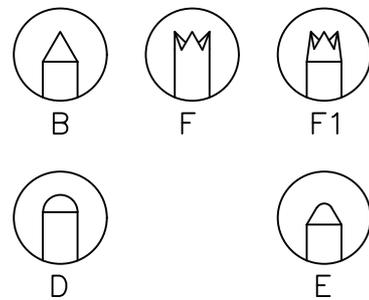

■ Mechanical

- Pitch: 0.50mm
- Recommended travel: 0.7mm
- Full travel: 2.0mm
- Spring force: 23g±7g at recommended travel

■ Material and plating

- Top Plunger: Hardened BeCu, Gold plated
- Bottom Plunger: Hardened BeCu, Gold plated
- Barrel: Phosphor Ph, Gold plated
- Spring: SWP-A/B, Gold plated

■ Electrical Specifications

- Current Rating: 0.5amps
- Resistance: Less than 150mΩ
- Bandwidth: 2.3GHz@-1dB

	Name	Date	Description:	Scale:
Drawn				
Approved				
Checked				
			Part NO.: TEX038-D-F-8.85	Index: Size: A4